

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 21 TOWNSHIP 14 RANGE 4

DATE: 11-06-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison monument fd

METHOD OF ESTABLISHMENT: County: 2-29-08


IN. S.P.C. E ZONE NAD '83

NAME: 14042105

N: 488022.4704(m)

E: 63485.3778(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

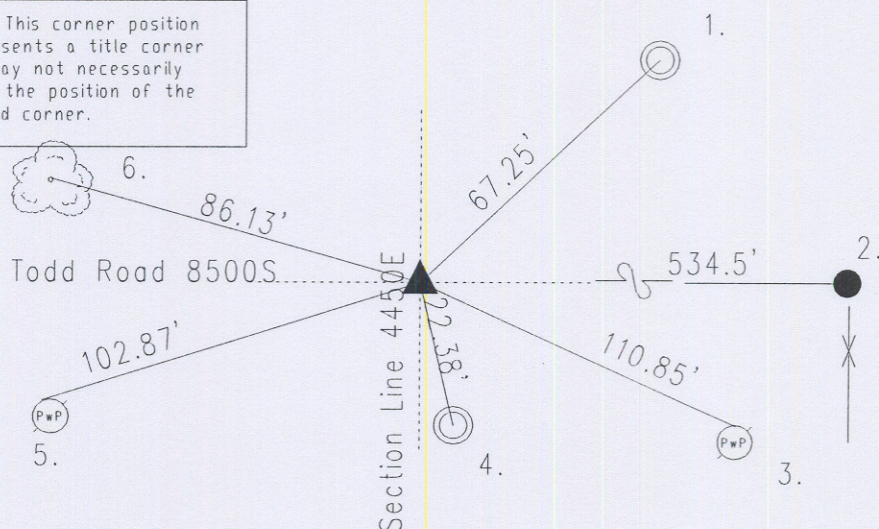

Survey by Hosbrook with witness: 18" swamp ash N 12 E 10 links; 26" oak S 60 E 43 links per Perry Township Legal Survey Book pg.17. MCSO 2-23-44 called stone found 12" down. Reference dated 3-18-47 called an axle with gear up found with stone under fill. McLand 8-12-70 called railaord spike over stone 18" down. 7-22-75 Wilcoxon called PK nail over stone. Miller 3-19-76 called railroad spike. Wilcoxon excavated 6-5-92 stone found 18" down. Size 20"x14"x16". Set Harrison. Re-tied 9-29-94 by Whiteside. Re-tied 7-29-99 by Kiste. Corner destroyed 2003. Re-set corner by Stoepfelwerth & MCSO on site. Reference dated 11-6-08 by Wilcoxon raised Harrison.

14042105

REF.	DISTANCE	DESCRIPTION
1.	67.25'	Cut 'x' in center of sewer manhole
2.	534.5'	Due F to stone for property line
3.	110.85'	Nail N PwP#35-823 12"up
4.	22.38'	Cut 'x' in center of sewer manhole
5.	102.87'	Mag nail w/bw N PwP#61-822 12"up
6.	86.13'	Boat spike S 20" twin hickory 12"up